


M1

Live Performance Dynamic Microphone

RØDE[®]
MICROPHONES

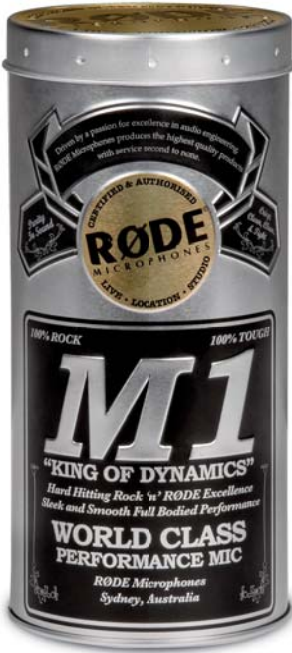

The RØDE M1 dynamic microphone was designed to be the Roadie's best friend. Its rock solid die-cast body and sturdy dynamic capsule ensure the M1 can take all the abuse you can throw at it without showing signs of age or neglect.



RØDE's attention to detail has resulted in a microphones that will continue to offer high quality performance, day after day.

Features

- Live dynamic vocal microphone
- High output dynamic capsule
- Gold plated XLR connectors
- Balanced, low impedance output
- Internal pop-filter to reduce plosives
- Feedback rejecting pick up pattern
- Heavy duty metal body
- Low handling noise
- Designed and manufactured in Australia
- Full 10 year warranty*

Specifications

Acoustic Principle	Dynamic
Frequency Range	75Hz ~ 18,000Hz
Nominal Impedence	320Ω
Net Weight	360g (0.79lb)
Directional Pattern	Cardioid
Sensitivity	-56dB ±2dB re 1V/Pa (1.6mV @ 94 dB SPL) @ 1kHz
Dimensions	Length - 171mm (6.73") Diameter - 51.5mm (2.03")
Shipping Weight	700g (1.54lb)
Output Connection	3 pin XLR, balanced output between Pin 2 (+), Pin 3 (-) and Pin 1 (ground)

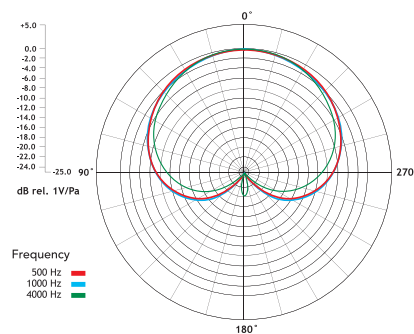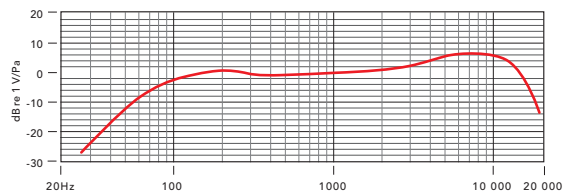

Included Accessories

- RM1 stand mount
- ZP1 zip pouch

www.rodemic.com

*After online registration